

BAO TONG USA dba TYSONIC BATTERY

Lithium Manganese Dioxide Non-Rechargeable

9V LITHIUM BATTERY






MODEL	TY-CR9V
CROSS REFERENCE	U9VL-BP, U9VL-FP, U9VL-J, U9VL-X

SPECIFICATIONS

Voltage Range	5.4V to 9.9V
Average Voltage	9.0V
Nominal Capacity	1.2Ah @9mA to 5.4V @23°C
Maximum Discharge	400mA continuous
Pulse Capacity	up to 800mA varies subject to discharge characteristics temperature and applications, etc.
Typical Weight	50.0 grams
Operating Temperature	-50°C to +85°C
Storage Temperature	-40°C to +60°C
Self-Discharge	0.15% per month @23°C
Exterior/Housing	Plastic/Nickel plated steel
Terminals/Connectors	Nickel plated miniature snap
Safety	UL compliant
Transportation	Exempted from Class 9 regulations

Features

- High energy density
- Hermetic glass-to-metal sealing
- Stable discharge voltage
- Wide operating temperature range
- Over 10 years service life
- Lasts up to 5X longer than ordinary 9V alkaline batteries
- Lasts up to 10X longer than carbon-zinc batteries

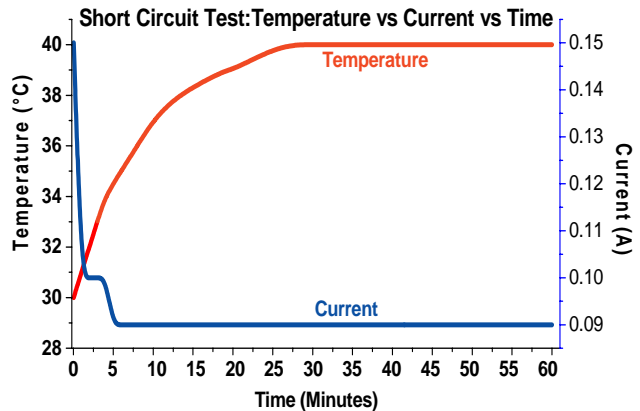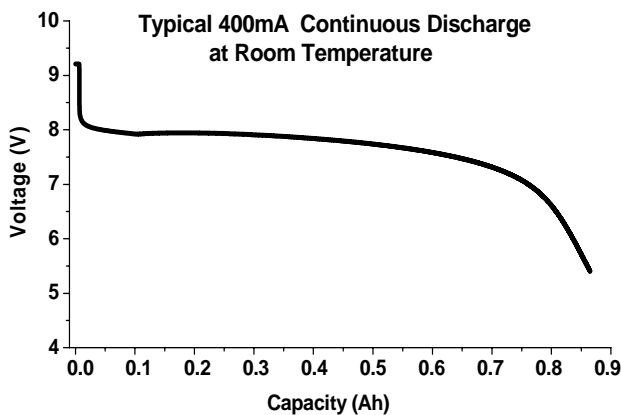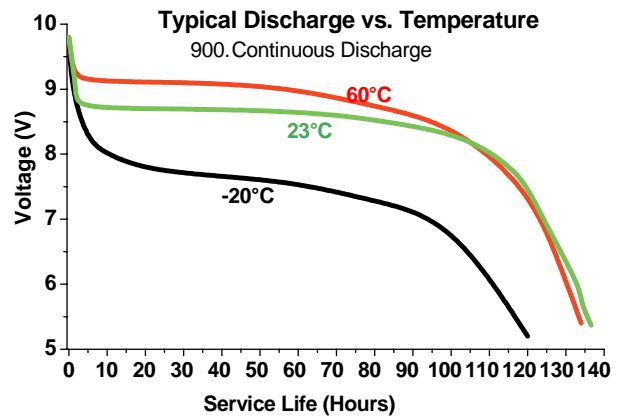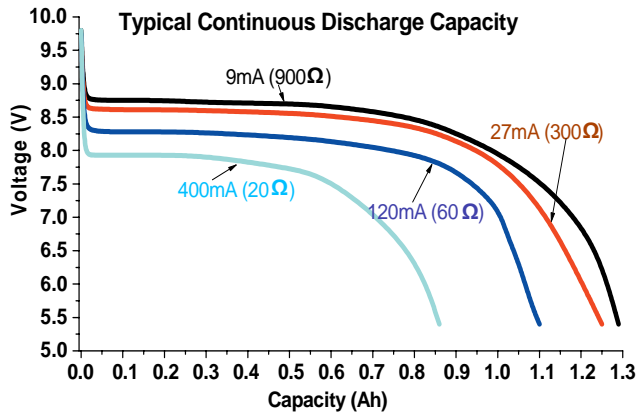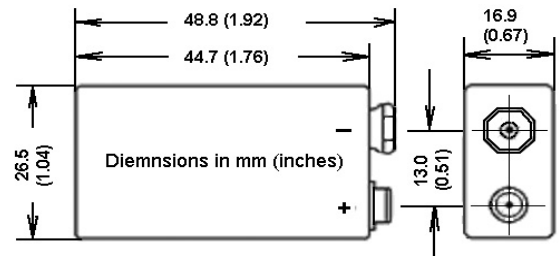

--- The information contained herein is for reference only and does not constitute a warranty of performance ---