




TYSONIC[®]


NON-SPILLABLE SEALED RECHARGEABLE BATTERY CB121100 12V, 110Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 110.0 Ah	20 hr @ 5.5A : 110 Ah
● DIMENSIONS	10 hr @ 9.9A : 99 Ah
TOTAL HEIGHT : 221 mm (8.70 inches)	5 hr @ 17.6 A : 88 Ah
CONTAINER HEIGHT : 214 mm (8.43 inches)	1 hr @ 66 A : 66 Ah
LENGTH : 329 mm (12.95 inches)	1 C @ 110 A : 55 Ah
WIDTH : 172 mm (6.77 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 6.5 mΩ
WEIGHT : APPROX 34.10 kg (75.18 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 800 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 2000 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-02	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 33 A


Discharge Characteristics 25 °C (77 °F)

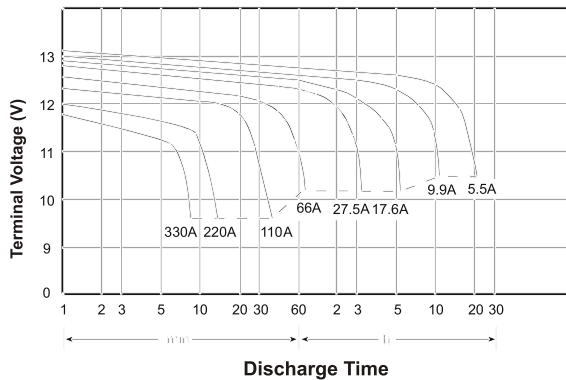

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

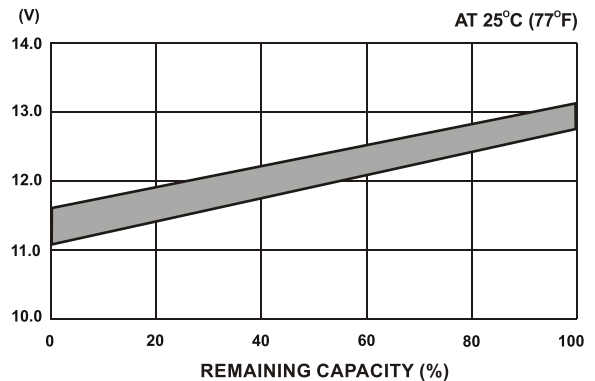

☆ Dimensions

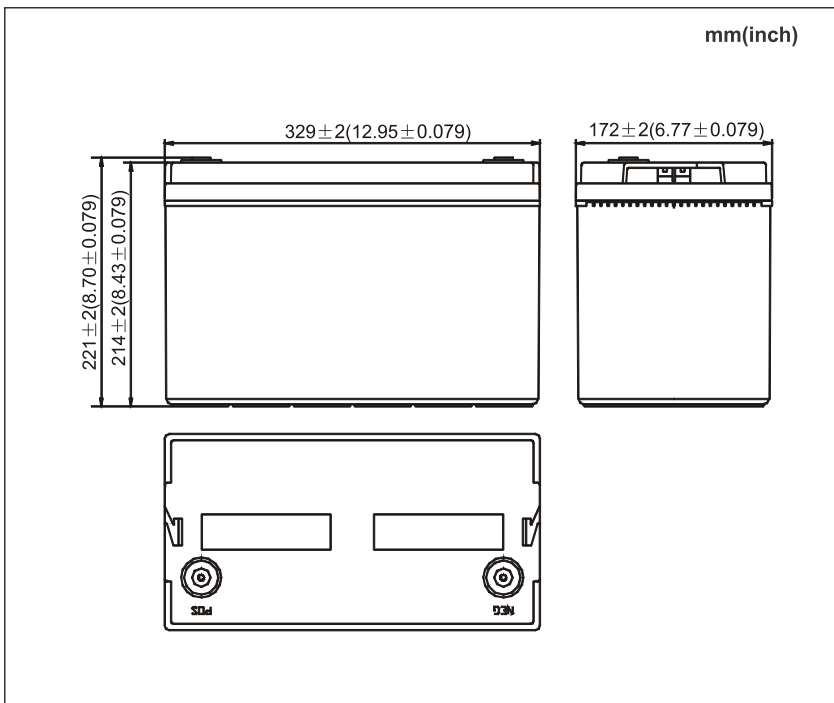

☆ Terminal

