

TYSONIC NON-SPILLABLE SEALED RECHARGEABLE BATTERY

TY634 6V, 3.4Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 6 V
- NOMINAL CAPACITY(20 hrs) : 3.4 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 67 mm (2.64 inches)
 - CONTAINER HEIGHT : 60 mm (2.36 inches)
 - LENGTH : 134 mm (5.28 inches)
 - WIDTH : 34 mm (1.34 inches)
- WEIGHT : APPROX 0.69 Kg (1.52 lbs)
- MAX DISCHARGE CURRENT : 34 A (5 sec)
- STANDARD TERMINALS : FO-01
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 C / 77 F
 - 20 hr @ 0.17 A : 3.4 Ah
 - 5 hr @ 0.54 A : 2.7 Ah
 - 1 hr @ 2.04 A : 2.04 Ah
 - 1 C @ 3.4 A : 1.7 Ah
- INTERNAL RESISTANCE() : 25 mΩ @ 25°C, 77 F Ω
- CHARGING VOLTAGE (25C, 77 F°)
 - STANDBY USE : 2.2750.025 V/CELL
 - : (-3.3mV / C / CELL)
 - CYCLE USE : 2.450.05 V/CELL
 - : (-5 mV / C / CELL)
- MAX CHARGING CURRENT : 1.02 A


Discharge Characteristics 25 C (77 F)⁰

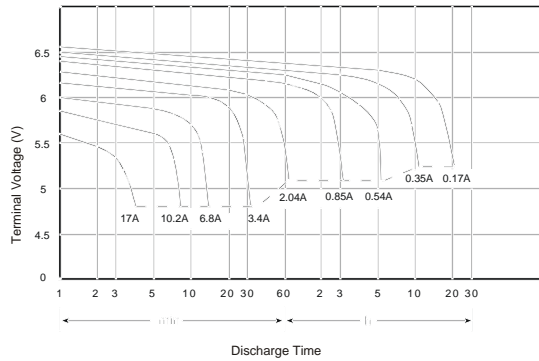

Discharge Current vs Time

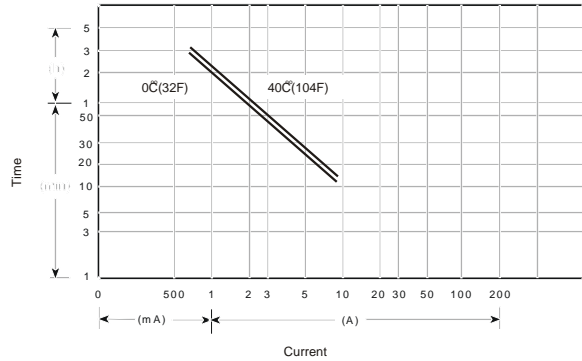

☆ Dimensions

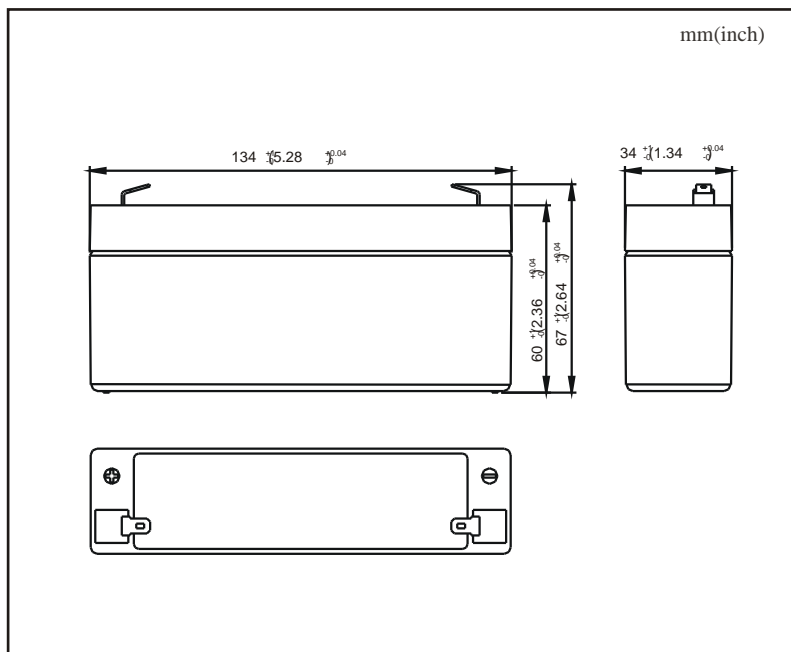

☆ Terminal

